


How to Measure and Order Valances

A valance is supplied with your order in one of the following styles, depending on how your blind will be mounted. For a more custom look, the valance and returns may be special ordered to your measurements.


NOTE: Valances with returns are measured and cut from the **INSIDE** of the miter to ensure the most accurate fit when installed over the headrail or window frame.

Blinds ordered as an OUTSIDE MOUNT will be supplied with returns sized to cover the end of the blind back to the mounting surface. If projection brackets are requested when the blind is ordered, longer returns will be sent automatically. Outside mount blinds are available without returns upon request.

Top View - Outside Mount

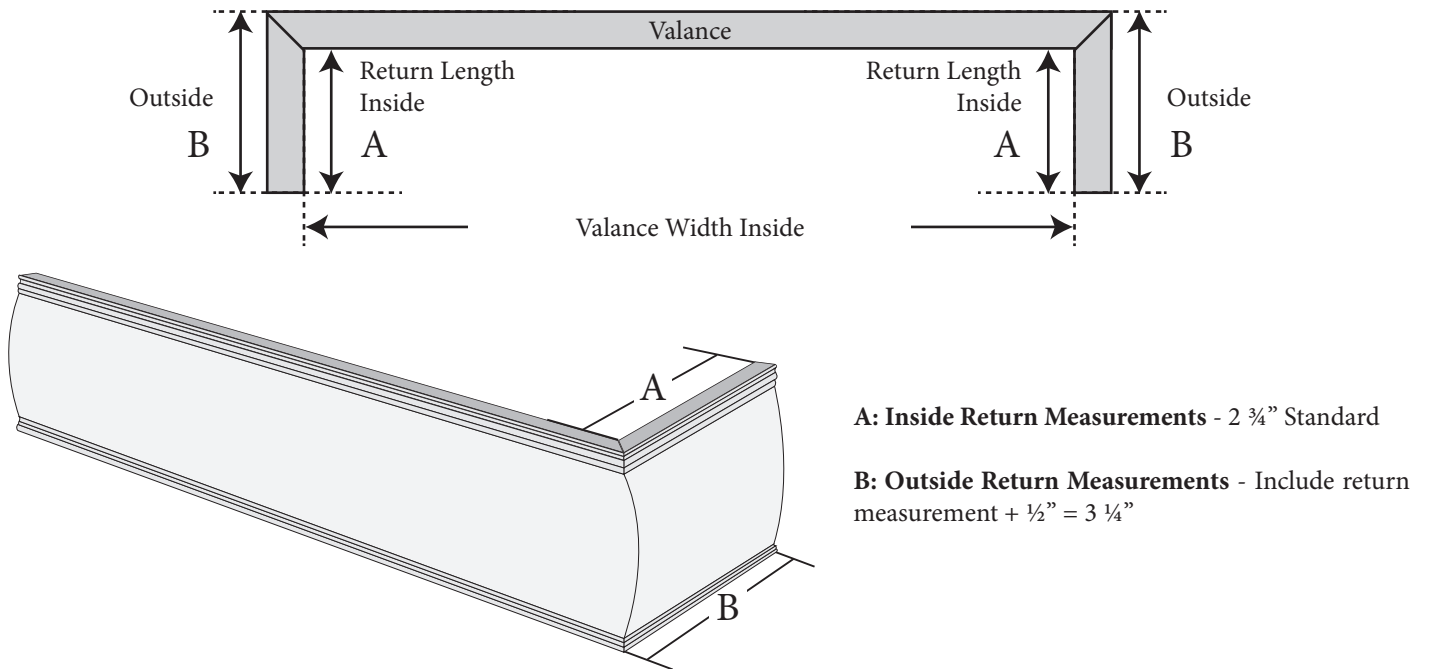

Blind Ordered as an INSIDE MOUNT with OB Valance will be supplied with 1/2" returns with cord tilt, 3/4" returns with Wand tilt or 2.5" slat sizes.

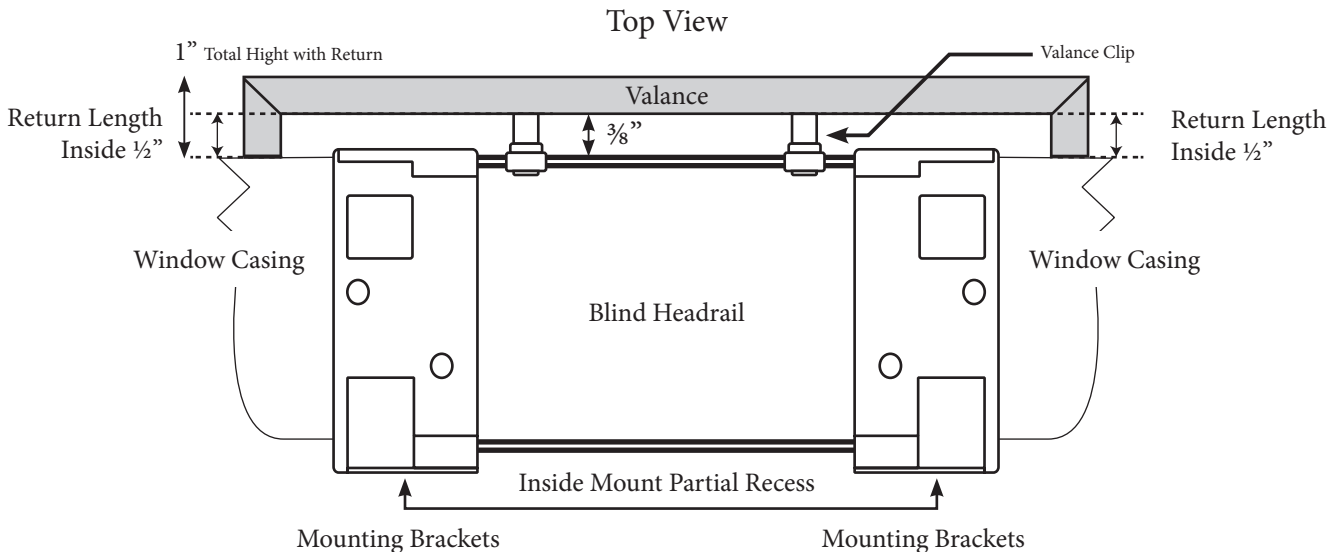

Ordering Information

Please state at the time of order if the valance and return measurement are for the **EXACT** size required so that no additions or deductions are made.

Different return sizes can be ordered for the same valance. Always provide **LEFT** return **INSIDE** measurements first when ordering.

Valance Returns will have an adhesive strip to ensure a flush seam with the headrail Valance. All standard valance returns come with an "L" clip to support and hold a 90° angle of the Valance Return.

Bay and Corner Blind – must specify return length on inside mount at the time of order.

Valance and Return Specifications

Custom Valance Widths are available upon request. Maximum widths for valance are as follows:

The maximum continuous width is 110"

Valance Width greater than 110" will be spliced into 2 sections.

Custom Return Lengths are available upon request.

The minimum return length is 1"

The maximum return length is 6"

A space of ½" is added to the Valance for play so that the valance fits comfortably.

3" Return Lengths are factory adjusted when extension brackets or (1 set of) spacer blocks are ordered.

Short Extension Brackets = 4 ¼"

Small Spacer Blocks (1st Set) = 3 ⅜"

Long Extension Brackets = 6 ¼"

Large Spacer Blocks (1st Set) = 3 ¾"

NOTE: Valance are cut to measure from the **inside** miter to ensure the most accurate fit when installed over the headrail or window frame.

